

# ORIEL RANGE

## INSTRUCTION OF USE

To adjust back height hold back with two hands while seated and raise to desired height


To lower the back height raise back all the way to the top and release slowly

**RIGHT BACK LEVER**  
To adjust back angle

**RIGHT FRONT LEVER**  
To adjust seat height

**600MM BLACK NYLON 5 STAR BASE WITH CASTORS**

Use soft tyred castors for tiles  
Use hard tyred castors for carpet

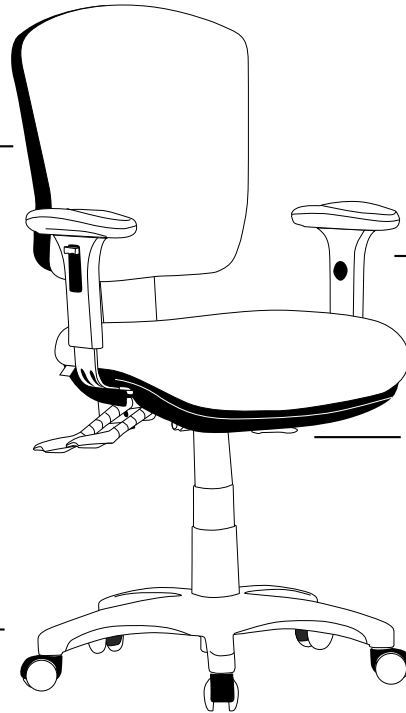

**INDOOR USE ONLY**

**OPTIONAL  
ADJUSTABLE ARMS**

**LEFT LEVER**  
To adjust seat angle

**X** Do not use as a step ladder

## DIMENSIONS: (mm)

### **LOW BACK LOW BACK TO FLOOR**

W: 460    Lowest: 850  
H: 440    Highest: 1060

### **HIGH BACK HIGH BACK TO FLOOR**

W: 470    Lowest: 950  
H: 540    Highest: 1170

### **SEAT**

W: 500  
D: 460

### **SEAT TO FLOOR**

Lowest: 485  
Highest: 625

### **ARM TO FLOOR**

Lowest: 630  
Highest: 840

Fabric: Chelsea ryegrass



OR350H



OR350



OR200

Optional:



Drafting kit



Adjustable arm

## Features:

Adjustable seat height  
Adjustable back height (ratchet)  
Adjustable seat angle  
(with 3 lever mechanism only)

Adjustable back angle  
Optional 2 or 3 lever mechanism  
Moulded seat and back foam  
Java seat

600mm black nylon 5 star base  
Available in local fabrics  
AFRDI tested to level 6  
Suitable for indoor use only

